

# Model NPS32F



## Product Overview


NPS32F is made from high-quality silicon piezoresistive sensor chip. The piezoresistive sensor chip is packaged in a fluid-filled cylindrical cavity and isolated from measured media by a stainless steel diaphragm and housing. NPS32F is temperature compensated and zero correction by using resistance technology. It is flush membrane configuration and easy to clean. It can be used for food industry.

NPS32F pressure sensor are designed for clamp connection mounting. Various pressure interface available.

## Applications

- Process control systems
- Refrigeration and HVAC controls
- Hydraulic systems and valve
- Pharmaceutical engineering
- Level measurement
- Food and the beverage industry

## Constant current schematic diagram

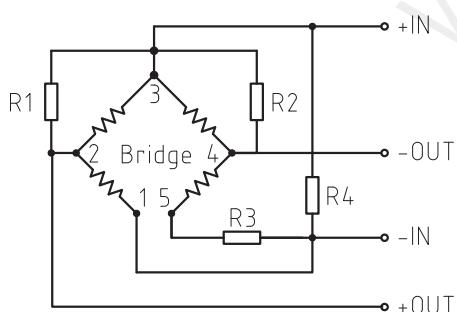

## Features

- 100mbar to 100bar (14.5psi to 1450psi)
- Absolute, gauge and sealed gauge
- Flush membrane configuration
- $\pm 0.25\%$  static accuracy
- Calibrated and temperature compensated
- Rugged 316L stainless steel isolated package
- Piezoresistive sensor design
- Various pressure interface available
- Solid state, high reliability
- Custom configurations and other pressure ranges available. Please consult the factory.

## Standard Pressure Range

Nominal pressure	gauge	sealed gauge	absolute
0...0.1bar	●		
0...0.2bar	●		
0...0.35bar	●		
0...0.7bar	●		
0...1bar	●		●
0...1.6bar	●		●
0...2.5bar	●		●
0...4bar	●		
0...6bar	●		●
0...10bar	●	●	●
0...16bar	●	●	●
0...25bar	●	●	
0...60bar		●	
0...100bar		●	

other pressure ranges available. Please consult the factory.


## Performance Specifications

Parameter	Value	Units	Notes		
<b>General</b>					
Pressure Range	0-0.1,...,100	bar	1bar=14.5psi		
Overpressure	1.5xFS	bar			
<b>Environmental</b>					
Operating Temperature Range	-40 to +85 option -40 to +125	°C	-40°F to 185°F		
Compensated Temperature Range	0 to +70	°C	32°F to 158°F		
Storage Temperature Range	-40 to +125	°C	-40°F to 257°F		
Vibration	10	g	20 to 2000Hz		
Shock	100	g	10ms		
Cycles	$10 \times 10^6$	cycles			
<b>Electrical @25°C(77°F)</b>					
Excitation Current	1.5	mA			
Excitation Voltage	10	Vdc			
Bridge Resistance	2600 to 6000	Ω			
Insulation Resistance	100	MΩ	@100Vdc		
<b>Physical Specifications</b>					
Media Compatibility	All media compatible with 316L stainless steel				
Housing	316L stainless steel				
Diaphragm	316L stainless steel				
Oil Filling	Silicone oil				
Pressure Connection	Clamp				
Electrical Connection	Silicon rubber flexible wire or kovar pin				
Net Weight	Approx.110g				
Parameter	Minimum	Typical	Maximum	Units	Notes
<b>Performance</b>					
Zero Output	-2	±1	2	mV	1
Full Scale Output	50	100		mV	1
Non-linearity	±0.1	±0.2	±0.3	%FSO	1, 2
Hysteresis	-0.05	±0.03	0.05	%FSO	1
Repeatability	-0.05	±0.03	0.05	%FSO	1
Temp Coeff - Zero	-1.5	±0.75	1.5	%FSO	3
Temp Coeff - Span	-1.5	±0.75	1.5	%FSO	3
Long-Term Stability		±0.2	±0.3	%FSO/year	1

### Notes

1. All values measured at 25°C(77°F) and at 1.5mA
2. Best fit straight line(BFSL)
3. 0°C to 70°C(32°F to 158°F) with reference to 25°C(77°F)
4. Consult factory for vacuum applications

## Dimensions (in mm)

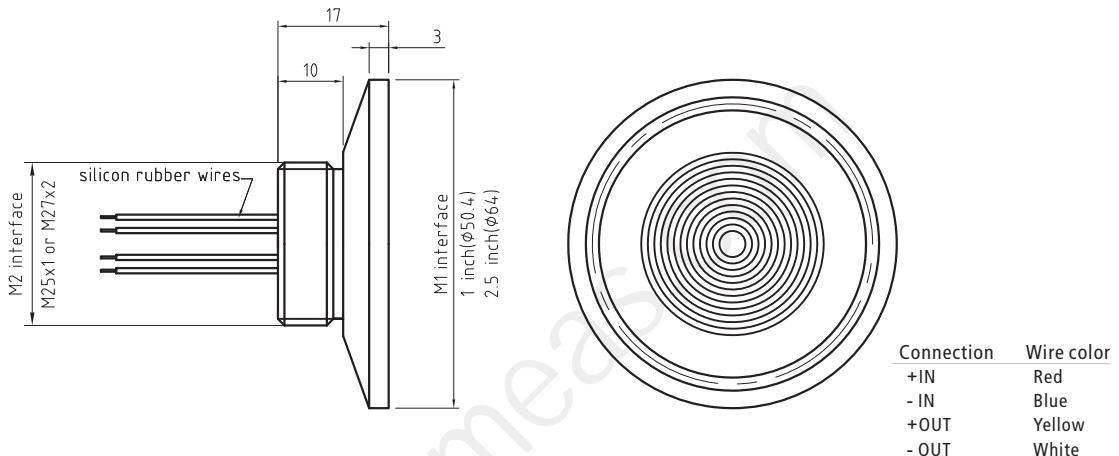

Note: The actual electric connection method, please check the parameter label enclosed with products

## Ordering Information

Option1: Model	
NPS32F	Piezoresistive OEM Pressure Sensor
Option2: Pressure Range	
0001	0...0.1bar
0002	0...0.2bar
0003	0...0.35bar
0010	0...1bar
0016	0...1.6bar
0025	0...2.5bar
0040	0...4bar
0060	0...6bar
0100	0...10bar
Option3: Pressure Type	
G	gauge
A	absolute
S	sealed gauge
Option4: Excitation	
I	1.5mA Constant Current Excitation
V	10Vdc Constant Voltage Excitation
Option5: Electrical Interface	
F	4 color silicon rubber wires, length=100mm
P	gold-plated kovar pins (only for 1.5mA Constant Current Excitation)
Option6: M1 Interface	
C1	2 inch clamp
C2	2.5 inch clamp
Option7: M2 Interface	
B1	M25x1(standard)
B2	M27x2
Option8: Compensation	
T	0 to 70°C
NA	No temperature compensation
NPS32F	0010 G I F C1 B1 T Examples of Ordering Code: NPS32F-0010-G-I-F-C1-B1-T